

HI-SCAN 5030si

HEIMANN X-RAY INSPECTION SYSTEM



Feature Highlights

- **Compact desktop solution for mobile and stationary applications**
- **New X-ray generator plus new sensor technology for high performance**

Optional

- **HI-TIP: Threat Image Projection**
- **Xtrain: Operator training system**
- **IMS: Electronic image storage and archive**
- **Xport: Image export in TIF- or JPEG format incl. automatic transmission to PC via Ethernet**

HI-SCAN 5030si is the consequent advancement of HI-SCAN 5030, with more than 3000 installations worldwide an extremely successful compact X-ray inspection system.

Planned in modular design as a tabletop system, HI-SCAN 5030si is flexibly extensible and therefore is fit for different applications.

Due to state-of-the-art X-ray-, sensor- and computer-technologies this system offers functionalities, which used to be known from complex solutions for aviation security purposes only.

HI-SCAN 5030si permits configurations with operator training, TIP- and image management functionalities.

Being one of the most space-saving X-ray inspection systems available, HI-SCAN 5030si is ideal for use in mailrooms, entrance halls, correctional and judicial facilities, schools and many other security sensitive areas, where contact-free inspection of pouches, bags, letters or packages is required.

HI-SCAN 5030si - increased security by advanced technology.

Technical Data HI-SCAN 5030si

General Specifications

Tunnel dimensions	532 (B) x 330 (H) [mm] • 21" (B) x 13" (H)
Max. object size	530 (B) x 320 (H) [mm] • 20.9" (B) x 12.6" (H)
Conveyor height ¹⁾	approx. 190 mm (7.4")
Conveyor speed at mains frequency	approx. 0.18 / 0.22 [m/s]
50 Hz / 60 Hz	
Max. conveyor load (evenly distributed)	60 kg (132 lbs)
Resolution (wire detectability ³⁾)	Standard: 38 AWG (0,13 mm) • typical: 39 AWG (0,10 mm)
Penetration (steel) ³⁾	Standard: 10 mm • typical: 12 mm
X-ray dose (typical)	HI-MAT: 1,6 µSv (0,16 mrem)
Film safety	Guaranteed even for high speed films up to ISO 1600 (33 DIN)
Duty cycle	100 %, no warm-up procedure required

X-ray Generator

Anode voltage • cooling	100 kV cp • hermetically sealed oil bath
Beam direction	diagonal

Image Generating System

X-ray converter	L-shaped detector line, high resolution
Grey levels stored	4096
Image presentation	S/W, color
Digital video memory	1280 x 1024 / 24 bit
Image evaluation functions	B/W, HIGH, LOW, NEG; incl. Option HI-MAT, additionally VARI-MAT, O ² , OS electronic zoom: stepless enlargement up to 16-times
Monitor	17" color monitor, low radiation according to MPR II und TCO 99 standards other monitors on request

Additional Features

Features	Fading-in of date/time, luggage counter, user-id number, luggage marking system (acoustic), display of operating mode, REVIEW-feature to recall previously visible image areas, zoom overview, free programmable keys HI-TIP, HI-SPOT, SEN, Xport, IMS (Image Management System)
Options	

Installation Data

X-ray leakage	meets all applicable laws and regulations with respect to X-ray emitting devices
CE-labelling	in compliance with 98/37/EWG, 72/23/EWG, 89/336/EWG
Sound pressure level	< 56 dB(A)
Operating- / storage temperature ⁴⁾	0° - 40°C / -20°C - +60°C
Humidity	10% - 90% (non-condensing)
Power supply ⁵⁾	standard: 230 VAC or 110 VAC +10% / -15% • 50 Hz / 60 Hz ± 3 Hz
Power consumption	approx. 0,3 kVA
Protection class system / keyboard	IP 20 / IP 43
Dimensions • Weight ⁶⁾	1200 (L) ²⁾ x 705 (B) x 726 (H) [mm] • approx. 160 kg 47.3" (L) ²⁾ x 27.7" (B) x 28.6" (H) • approx. 352 lbs
Mechanical construction	Steel construction with aluminum panels standard color(s): RAL 9006 (white aluminium) / stainless steel or RAL 7016 (dark grey) / stainless steel

¹⁾ approx. values (adjustable)


²⁾ different length of conveyor and mechanical access protection on request

³⁾ Conds.: steel step wedge, CU wires, 0.18 m/s belt speed

⁴⁾ extended temperature range on request

⁵⁾ different values optional

⁶⁾ without control desk, keyboard, monitor(s) etc.

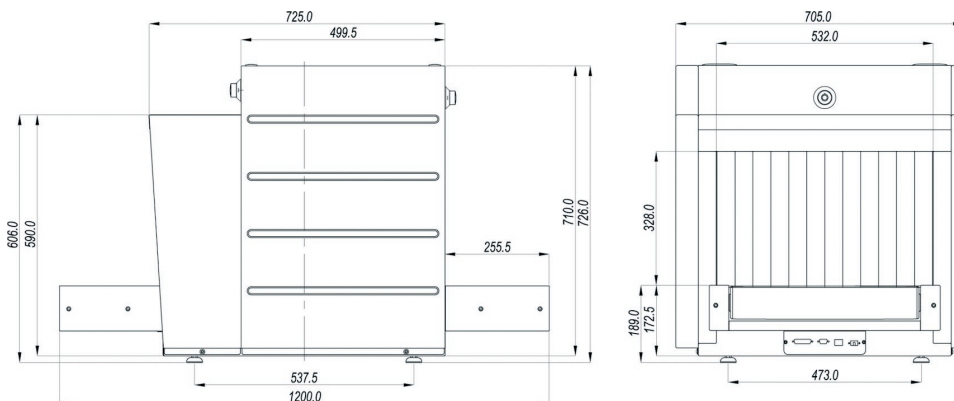

Germany

Smiths Heimann GmbH
Im Herzen 4
65205 Wiesbaden
T: +49 (0)611 9412-0
F: +49 (0)611 9412-229
mail.germany@smiths-heimann.com
http://www.smiths-heimann.com

France

Smiths Heimann S.A.S.
36, rue Charles Heller
94400 Vitry sur Seine
T: +33 (0)1 55 53 55 55
F: +33 (0)1 46 80 34 99
mail.france@smiths-heimann.com

UK

Smiths Detection International UK
459 Park Avenue
Bushey, Watford
Herts WD23 2BW
T: +44 (0) 1923 294400
F: +44 (0) 1923 294401
mail.uk@smiths-heimann.com

USA

Smiths Detection Inc.
30 Hook Mountain Road
PO Box 410
Pine Brook, NJ 07058
T: +1 973 830-2100
F: +1 973 830-2200
mail.usa@smiths-heimann.com

Canada

Smiths Detection Montréal Inc.
950 Bergar, Laval (Quebec)
Canada H7L 5A1
T: +1 (450) 967-0010
F: +1 (450) 967-7444
mail.canada@smiths-heimann.com

Singapore

Smiths Detection Asia Pacific Pte. Ltd.
3 Toh Tuck Link #04-01
German District Centre
Singapore 596228
T: +65 6 466-1700
F: +65 6 469-2506
mail.singapore@smiths-heimann.com

